


HN & HP SERIES

Pendant and Insertion

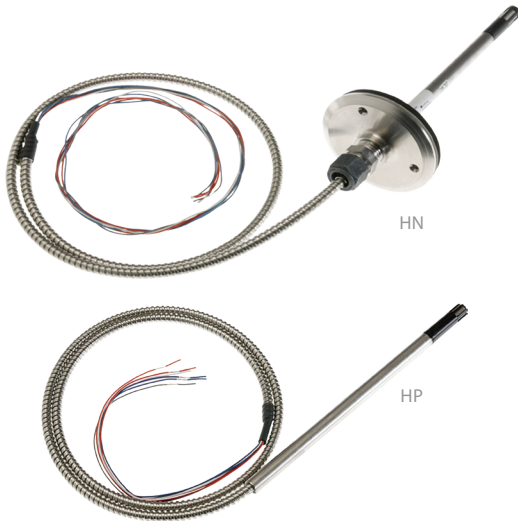

HN and HP Series probe type humidity transmitters are easy to install and exceptionally accurate. Their long-term stability and trouble-free serviceability make them among the best in the industry. The electronics are embedded inside the probe, protecting them from condensation-related failures. The thin-film capacitive HS sensor elements are factory calibrated using NIST traceable calibration equipment, eliminating the need for field calibration. Field replacement of the sensor element is a snap with the patented removable sensor, lowering costs and reducing downtime.

SPECIFICATIONS

INPUT POWER

Voltage Model	Class 2; 12 to 30 Vdc/24 Vac, 15 mA max.
mA Model	Class 2; Loop powered 12 to 30 Vdc only, 30 mA max.

OUTPUT

Voltage Model	3-wire, observe polarity
mA Model	2-wire, not polarity sensitive (clipped & capped)

HUMIDITY

HS Element††	Digitally profiled thin-film capacitive (32-bit mathematics) U.S. Patent 5,844,138
Accuracy @ 25°C**	±1%, 2%, 3%, or 5% (specify)@10 to 80% RH; Multi-point calibration, NIST traceable
Reset Rate***	24 hours
Stability	±1%@20 °C (68 °F) annually, for two years
Hysteresis	1.5% typical
Linearity	Included in accuracy spec.
Temperature Coefficient	±0.1% RH/°C above or below 25 °C (typical)
Scaling	0 to 100% RH

TEMPERATURE OPTION

Optional Temperature Transmitter Output	Digital, 4 to 20 mA (clipped & capped) or 0-5/ 0-10 V output; accuracy ±0.5 °C (±1 °F) typical
---	--

Sensor element

Thin-film capacitive sensor element recovers from 100% saturation

Corrosion resistant

Electronics are encapsulated in stainless steel probe to resist corrosion

Interchangeable

Fully interchangeable element to 1%, 2%, 3%, or 5% accuracy...no calibration

Flexible

Pendant and insertion versions for application flexibility

Compatibility

Polarity insensitive two-wire 4 to 20 mA or 3-wire 0-5/0-10 Vdc versions...flexible systems compatibility

Calibration free

Calibration-free interchangeable NIST traceable HS element

APPLICATIONS

- HVAC control for improved comfort and energy savings
- Museums, schools, printing shops, and other locations requiring humidity control
- Facilitating compliance with ASHRAE standards for environmental control and indoor air quality

OPERATING ENVIRONMENT

Operating Humidity Range	0 to 100% RH non-condensing
Operating Temp Range	-40 to 50 °C (-40 to 122 °F)

WARRANTY

Limited Warranty	5 years †
------------------	-----------

AGENCY APPROVALS



* One side of transformer secondary is connected to signal common, so an Isolation transformer or dedicated power supply may be required.

** Specified accuracy with 24 Vdc supplied power with rising humidity. RTD/Thermistors are not compensated for internal heating of product.

*** Reset Rate is the time required to recover to 50% RH after exposure to 90% RH for 24 hours.

† The HS sensing element has a 1-year warranty. The element is not a part of the 5-year product warranty.

Shielded cabling is required for conformance to EMC standards. Technical information is available from factory upon request or is available on our website: www.veris.com.


EMC Conformance - CE Option: Low Voltage Directive 2014/35/EU and EMC Directive 2014/30/EU.

EMC Special Note: Connect this product to a DC distribution network or an AC/DC power adaptor with proper surge protection (EN 61000-6-1 specification requirements).




HN/HP (0-5V/0-10V VERSIONS)

Wiring Diagram

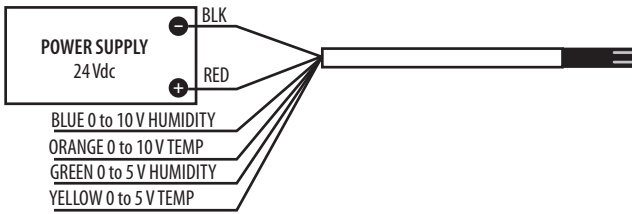


HN/HP WITH RTD/THERMISTOR (0-5V/0-10V VERSIONS)

Wiring Diagram

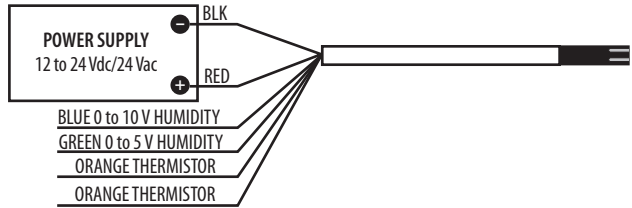


HN/HP WITH RTD/THERMISTOR (4-20 mA VERSIONS)

Wiring Diagram

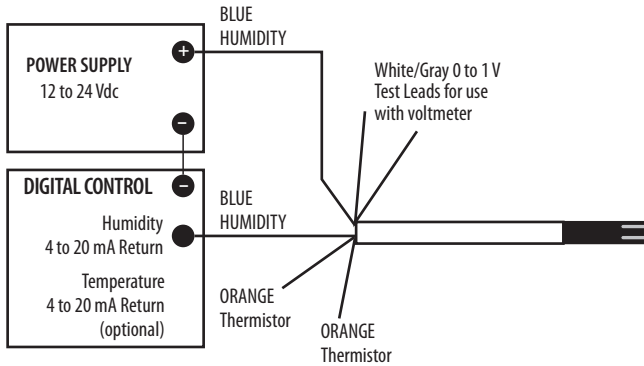


HN SERIES

Dimensional Drawing

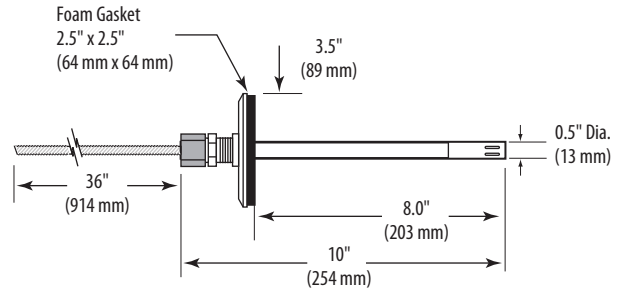


HP SERIES

Dimensional Drawing



HN/HP (4-20 mA VERSIONS)

Dimensional Drawing

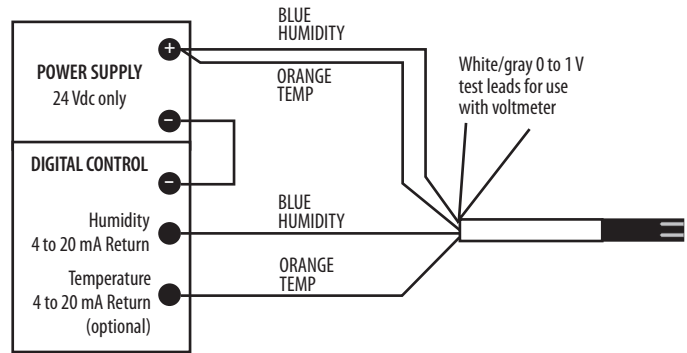

ORDERING INFORMATION


Enclosure H <input type="checkbox"/> N = RH Insertion P = RH Pendant	Accuracy <input type="checkbox"/> 1 = 1% 2 = 2% 3 = 3% 5 = 5%	NIST <input type="checkbox"/> N = NIST 1%, & 2% only X = None 2%, 3%, 5% only	Output <input type="checkbox"/> M = 4 to 20 mA V = 0-5V/0-10 Vdc	US or EU <input type="checkbox"/> S = Standard C = CE	Temp. <input type="checkbox"/> T = Temp X = No Temp (Stop here)	Humidity Transmitter Combination Sensor Type: <input type="checkbox"/> A = Transmitter Range: <input type="checkbox"/> 1 = -40 to 122 °F (-40 to 50 °C) 2 = 32 to 122 °F (0 to 50 °C) OPTION Temp Cert: <input type="checkbox"/> Blank = None 1 = 1pt Cal 2 = 2pt Cal
Humidity RTD/Thermistor Combination						
Sensor Type: <input type="checkbox"/> B = 100R Platinum, RTD C = 1k Platinum, RTD D = 10k T2, Thermistor E = 2.2k, Thermistor F = 3k, Thermistor G = 10k CPC, Thermistor H = 10k T3, Thermistor J = 10k Dale, Thermistor K = 10k with 11k shunt, Thermistor M = 20k NTC, Thermistor N = 1800 ohm TAC, Thermistor Q = 1uA/°C, Linitemp R = 10k US, Thermistor S = 10k 3A 221, Thermistor T = 100k, Thermistor U = 20k "D", Thermistor W = 10k T2 high accuracy, Thermistor Y = 10k T3 high accuracy, Thermistor						
OPTION Temp Cert: <input type="checkbox"/> Blank = None 1 = 1pt cal* 2 = 2pt cal*						

Example: (No Temp) H P 2 X V S X Stop Here

Example: (With Temp) H N 2 X V S T C 2

* Not available with W and Y high-accuracy thermistors.

ACCESSORIES



AA42
Water Guard, Humidity Sensor Protection Shield